


CAR WORKSHOP

# WITH WHEELS



## LCD DISPLAY


Increase/decrease power, temperature coolant and alarms



CUSTOMIZATION ON REQUEST



PERFECT FOR  
COMMERCIAL VEHICLES

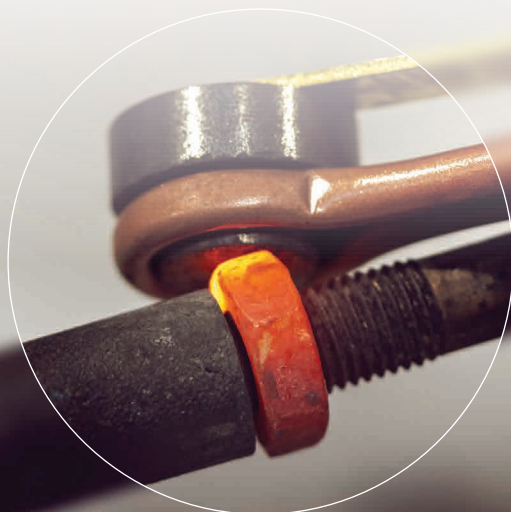

## IT 6k400 LCD

ART - IT 6K400 LCD

### STRENGTHS













- » Power level setting (kW)
- » Multiple temperature indicator system (°C/°F)
- » LCD panel 5 power levels (Keyboard on request)
- » Inductor cable 3,0 m
- » Alternative tips on request
- » **Ready to use** with tip ART - IND 5kW/S06

### APPLICATIONS

**IT 6K400 LCD heat inductors are ideal for a wide range of applications such as:**

- » Loosening bolts/nuts
- » Osening and replacing pins or bearings
- » Bending
- » Removing suspensions, shock absorbers
- » Straightening crankshafts

### TECHNICAL SPECIFICATIONS

-  400x340x1000h mm
-  800x850x1280h mm
-  66 kg
-  Input power 6 kW - 16 A
-  Electrical connection IEC60309 400V/3PH+T 50
-  Duty cycle 30 min\* (\* ± 5% ambient temperature at maximum power)
-  Frequency level 15-30 kHz
-  8 m Electric cable
- IP** Protection degree IP21
-  Protection fuses
-  20 L tank - Liquid cooling system
-  Hydraulic heat exchanger with fan
-  **UK CA** Directives and certifications

## CAR WORKSHOP: THE COMPLETE RANGE

### OTHER MODELS AVAILABLE

#### Variation between models

#### IT 5k400 LCD 5 kW

ART - IT 5K400 LCD

230 V

#### IT 5k230 LCD 5 kW

ART - IT 5K230 LCD

5 kW - 230 V

#### IT 5k230 LCD Lite 5 kW

ART - IT 5K230 KB Lite

5 kW - 230 V - 50 kg - 800x800x1280h mm

#### IT 4k230 LCD 4 kW

ART - IT 4K230 LCD

4 kW - 230 V - 50 kg - 800x800x1280h mm